



SIAT

M. J. MAILLIS GROUP

SK2 / S26

Semi Automatic Carton Sealers

Bottom side application tape



Strong lifting structure



S26

SK2

CE

for more details:




SK2




S26

Semi-automatic carton sealer with manual adjustment. Easy to use and simple to be adjusted, it can be started by any operator in few minutes. It allows a perfect closing of the box by adhesive tape thanks to the double top and bottom driving system and the super reliable taping unit K11R. The carton sealer has been designed and manufactured according to the **Machine Directive CE 392 and subsequent revisions.**

> SK2

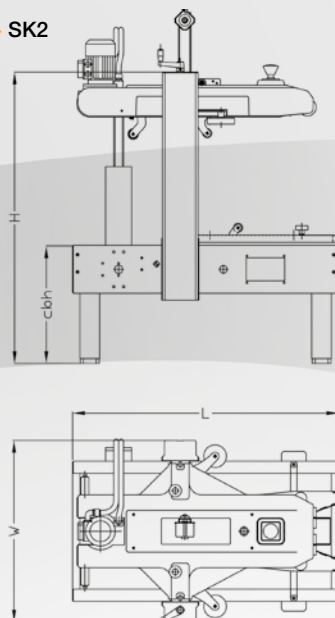

> S26

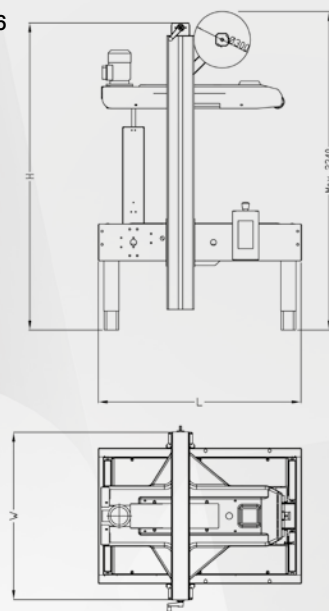

other languages: www.siat.com



> Machine dimensions

Dimensioni macchina
Machinemessungen
Dimensions machine
Dimensiones de la máquina

Size / Weigh packaging			LxWxH
> SK2	160	175	114x78x115
> S26	185	220	133x110x175


> SK2

	Min.	Max
L	1080	-
W	740	-
H	1230	1570
cbh	480	820
AS 77	580	920
AS 80	680	1020

> S26

	Min.	Max
L	1080	-
W	890	-
H	1555	2125
cbh	480	820
AS 77	580	920
AS 80	680	1020


> Taping units
Unità nastranti
Verschliesseinheiten
Unité enrubanneuse
Unidades de precinto



	K11R/ K12R
	mm
A	410 Max
B	50 / 75
C	76

> Box dimensions

Dimensioni delle scatole
Kartonabmessungen
Dimensions des boîtes
Dimensiones de las cajas



> SK2

	K11R std. / K12R on demand	
	Min.	Max
l	150	∞
w*	140 / 170	500
h	100	500


> S26

	K11R	
	Min.	Max
l	150	∞
w*	170	650
h	100	950

* With top side pressure rollers (minimum width manageable 180mm).
Upper guides required in case of width box less than 180mm (optional).

> Production capacity

Capacità di produzione
Produktionskapazität
Capacité de production
Capacidad de producción



> SK2

	Bph
Max pcs.*	1200


> S26

	Bph
Max pcs.*	1200

* Always based on shorter manageable box

> Standard voltage

Voltaggio standard
Standardspannung
Tension standard
Voltaje estándar



> SK2

380/400V - 50Hz - 3F	
440V - 60Hz - 3F	
Amps	1,08
Power kW	0,26
Phase	3Ph + PE

> S26


380/400V - 50Hz - 3F	
440V - 60Hz - 3F	
Amps	1,08
Power kW	0,26
Phase	3Ph + PE

> Optionals

Accessori
Zubehör
Accessories
Accesorios


> AS80

Higer legs
Set gambe più alte
Höhere Stützen
Pieds plus hauts
Set patas mas altas



> AS77

Casters
Set ruote
Satz Umlaufräder
Roues
Set ruedas




> RG

Roller conveyor
Piani a rullii Idler
Rollenbahnen
Plans à rouleaux
Tramo de rodillos



> GTL - GTR

Extendable conveyor
Rulliera estensibile
Ausziehbare rollenbahnen
Convoyeur extensible
Rodillos extensibles



> K-125 / K-250

Inkjet printer
Stampante ad inchiostro
Tintenstrahldrucker
Marquer à jet d'encre
Impresora de inyección de tinta

